



CFI-S86

High Performance

Socket478B Motherboard

User' s Guide


Edition 1.01

© 2002 CHYANG FUN INDUSTRY CO., LTD.

P/N: 155100-8970

WARNING

To make the system work normally, please ensure JBAT1 of the mainboard is set as below.
Refer to Fig. 2.1 in this manual for the location JBAT1.



If JBAT1 is shorted to 2-3, no CMOS data can be retained.

CAUTION

The motherboard is an electrostatic sensitive device. Don't open or handle except at a static-free workstation.

If you use 1.4 GHz CPU or above, please ensure to select the Fan that is able to cool the CPU down.

Windows, MS-DOS, and MS Word are trademarks of Microsoft Corporation.

Novell, Netware are trademarks of Novell, Inc.

Lotus, 1-2-3 and Symphony are trademarks of Lotus Development Corporation.

PC, AT, PC-DOS, OS/2 and Presentation Manager are trademarks of IBM Corporation.

UNIX is the trademark of AT&T.

All other brand and product names are trademarks or registered trademarks of their respective companies.

The information presented in this publication has been carefully checked for reliability; however, no responsibility is assumed for inaccuracies, whereas, specification is subjected to change without notice.

CONTENTS

CHAPTER 1	INTRODUCTION1	1
CHAPTER 2	JUMPER SETTINGS	3
2.1	Jumper Presentation	3
2.2	Graphical Description of Jumper Settings	3
2.3	Clear CMOS Data	4
2.4	CPU Frequency Setting	4
2.5	Factory Setting	4
CHAPTER 3	CONNECTOR CONFIGURATION	5
3.1	U1 - Socket478	5
3.2	FAN Connectors	5
3.3	J12 - Multiple Function Jumper	5
3.4	JCDIN1 - CD-IN Connector	5
3.5	CN4 - ATX 12V Connector	5
3.6	ATX Power Supply Connector	6
3.7	Rear Panel Connectors	6
3.8	Front Panel Connectors	6
CHAPTER 4	AWARD BIOS DESCRIPTION	7
4.1	Entering Setup	7
4.2	Standard CMOS Features Setup	8
4.3	Advanced BIOS Features Setup	9
4.4	Advanced Chipset Features Setup	10
4.5	Integrated Peripherals Setup	12
4.6	Power Management Setup	13
4.7	Pnp/PCI Configuration	15
4.8	PC Health Status	16
4.9	Frequency/Voltage Control	16
4.10	Password Setting	17
4.11	Exit Setup	18
4.11	Boot with BIOS Defaults	18
APPENDIX A	QUICK GUIDE	19

CHAPTER 1

INTRODUCTION

Preface

CFI-S86 is a 6-layers, Flex-ATX form factor, high-performance Socket478 motherboard. The system core logic is based on VIA P4M266 Chipsets. It is integrated with NEC uPD720100AGM USB 2.0 controller and Realtek RTL8100B Ethernet controller.

Features

CPU:

?? Support Intel Socket 478 Pentium 4 processor

Chipset:

?? VIA P4M266 chipsets

?? Winbond W83627HF LPC controller

?? Realtek RTL8100B Ethernet controller

?? NEC uPD720100AGM USB 2.0 controller

Architecture:

?? IBM PC and PCI 2.1/2.2 compatible

?? 400MHz Quad-pumped Front Side Bus

Main Memory:

?? Two 184-pin DIMM sockets

?? Support DDR200/266 SDRAM up to 2GB

VGA:

?? Integrated S3 ProSavage8 Graphics controller in North Bridge

?? Support 3D/2D enhancements

?? Support AGP8X bandwidth. Max. Bandwidth 2.1GB/sec

?? VT1621 TV Encoder, TV-out supported

Audio:

??AC-Link with AC'97 2.2 compliant

??Software audio with VT1612A 4-channel AC'97 codec

USB 2.0:

?? NEC uPD720100AGM USB 2.0 controller

?? Compliant with USB 2.0 specification

?? Support Hi-speed, Full-speed and Low-speed data transfer rate. Max. Bandwidth 480Mbits/s

?? The USB 2.0 driver supported

Chapter 1

Ethernet:

- ?? Realtek RTL8100B 10/100Base-T Ethernet controller
- ?? Full-Duplex supported
- ?? WFM 2.0 compliant

I/O Interface:

- ?? Winbond W83627HF LPC controller
- ?? Two enhanced PCI IDE channels which support up to 4 IDE devices with ATA-133 transfers up to 133MB/sec
- ?? Build in FDC supports 1.2M/1.44M/2.88M FDD

Back Panel I/O Output:

- ?? PS/2 mouse and keyboard connectors
- ?? 2 Type A USB connectors, 1 RJ-45 LAN port
- ?? 1 S connector, 1 Composite connector
- ?? 2 fast serial ports, 1 D-type 15-pin VGA connector
- ?? Line-in, MIC-in, Speaker-out

System BIOS:

- ?? Award BIOS with 2MB EEPROM
- ?? Built-in Trend? ChipAway Anti-Virus Program
- ?? ACPI/PnP supported

Expansion Slots:

- ?? 1 PCI slot, 1 AGP4X slot

Form Factor:

- ?? Flex-ATX @ 262 mm (L) × 180 mm (W), 6 Layers

Front Panel I/O Output Board:

- ?? 1 IR port, IrDA 1.0/FIR supported
- ?? 2 Type A USB connectors, 1 PS/2 mouse connector
- ?? Line-in, MIC-in, Speaker-out, Game port and Volume control
- ?? Board size @ 30 mm (L) x 180 mm (W)

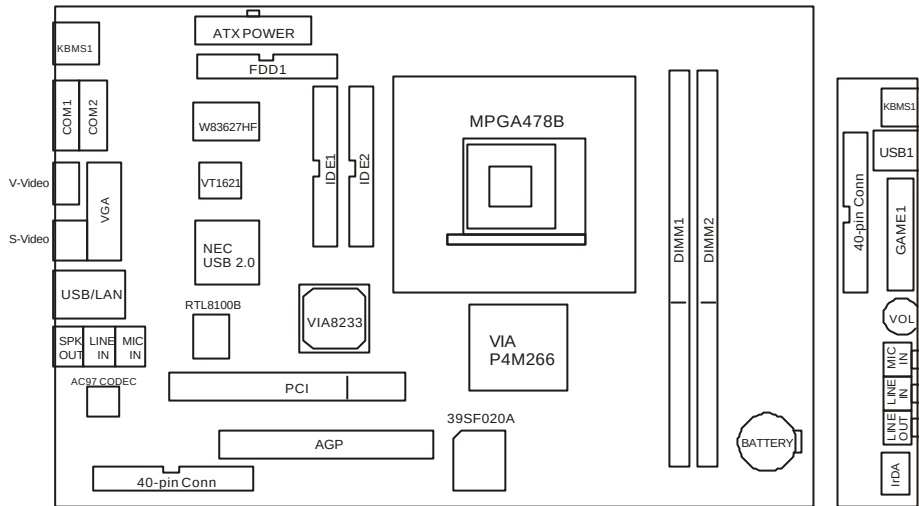


Fig. 1.1 Key Components of the Motherboard

CHAPTER 2

JUMPER SETTINGS

2.1 JUMPER PRESENTATION



1 2 3

Pins 1 and 2 are shorted with a jumper cap.



1 2 3

Pins 2 and 3 are shorted with a jumper cap.



two

The jumper is shorted when the jumper cap is placed over the pins of the jumper.



The jumper is opened when the cap is removed from jumper.

2.2 GRAPHICAL DESCRIPTION OF JUMPER SETTINGS

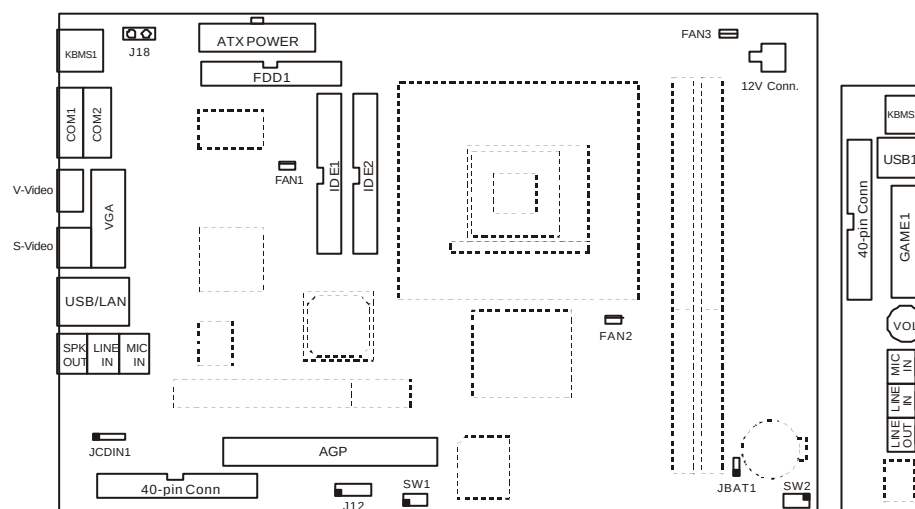




Fig. 2.1 Jumper /Connector Location of the mainboard

2.3 CLEAR CMOS DATA

JBAT1 is used to clear the CMOS Data in the RTC (build in ICH chip).


JBAT1	Description
 1	Normal
 1	Clear CMOS

2.3 CPU FREQUENCY SETTING

SW2	Description
 5 6 7 8	133MHz
 5 6 7 8	100MHz

Note: P4M266 only support 100MHz * 4 Front Side Bus, SW2 must set at [3,6].

2.4 FACTORY SETTING

SW1	Description
 1 2 3 4	SB Default

Note: SW1 is SB default setting, cannot be changed.

CHAPTER 3


CONNECTOR CONFIGURATION

Once the mainboard has been fastened into system case, the next step is to connect the internal cables. The internal cables are wire leads with plastic female connectors that attach to the connectors. The mainboard connectors have the various numbers of pins and are the contact points between the mainboard and other parts of the computer.

Refer to Fig. 2.1 for the location of the connectors.

3.1 U1 – SOCKET478

U1 is the Socket478 CPU socket which can support Intel Pentium 4 processor.




3.2 FAN CONNECTORS

FAN1, FAN2, FAN3 are fan connectors of case or CPU.
J18 is a +12V Case FAN Connector.

3.3 J12 – MULTIPLE FUNCTION JUMPER


J12 is a front panel multi-function jumper. The pin definition is as following figure.



3.4 JCDIN1 – CD-IN CONNECTOR


3.5 CN4 – ATX 12V Connector

3.6 ATX POWER SUPPLY CONNECTOR

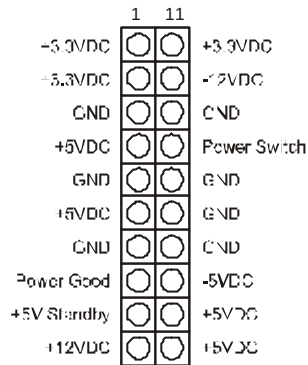

3.7 Rear Panel Connector


CN1 and CN2 is the V-port and S-port of Video connector.

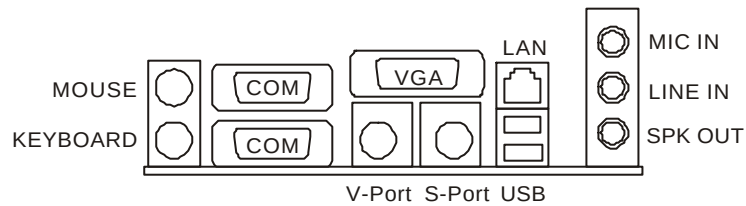

3.8 Front Panel Connector

VOL is the volume knob.

IrDA is an infrared transceiver module.



CHAPTER 4

AWARD BIOS DESCRIPTION

4.1 ENTERING SETUP

Power on the computer, when the following message briefly appears at the bottom of the screen during the POST (Power On Self Test), press <Del> key or simultaneously press the <Ctrl> + <Alt> + <Esc> keys, to enter the AWARD BIOS CMOS Setup Utility.

Press <Del> to enter SETUP

Once you have entered, the Main Menu (Fig. 4.1) appears on the screen. The main menu allows you to select from eleven setup functions and two exit choices. Use the arrow keys to select the item and press <Enter> to accept or enter the sub-menu.

Phoenix – AwardBIOS CMOS Setup Utility	
? Standard CMOS Features	? Frequency/Voltage Control
? Advanced BIOS Features	Load Fail – Safe Defaults
? Advanced Chipset Features	Load Optimized Defaults
? Integrated Peripherals	Set Supervisor Password
? Power Management Setup	Set User Password
? PnP/PCI Configurations	Save & Exit Setup
? PC Health Status	Exit Without Saving
Esc: Quit F9: Menu in BIOS ??? ? : Select Item F10: Save & Exit Setup	
Load Optimized Defaults	

Load Optimized Defaults

The Optimized Defaults are common and efficient. It is recommended to load the optimized defaults at first, and then modify the needed configuration settings.

4.2 STANDARD CMOS FEATURES SETUP

Use the arrow keys to highlight the item, and then use the <PgUp> or <PgDn> to select the value desired in each item.

Phoenix – AwardBIOS CMOS Setup Utility		
Standard CMOS Features		
Date (mm:dd:yy)	Tue, Jan 01 2002	Item Help
Time (hh:mm:ss)	11:23:33	
? IDE Primary Master		Menu Level ? Change the day, month, year and century
? IDE Primary Slave		
? IDE Secondary Master		
? IDE Secondary Slave		
Drive A	[1.44M, 3.5 in.]	
Drive B	[None]	
Video	[EGA/VGA]	
Hal On	[All, But Keyboard]	
Select Display Device	[CRT]	
Select TV mode	[NTSC]	
Base Memory	640K	
Extended Memory	63488K	
Total Memory	64512K	
??? ? :Move Enter:Select +/-PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

Data: Set the day, month, year and century.

Time: Set the internal clock.

IDE Primary/Secondary Master/Slave: Press **Enter** to enter the detail settings of hard drive.

IDE HDD Auto-Detection: Press Enter to detect the HDD's status automatically.

IDE Primary Slave: *Auto, Manual, None*

Access Mode: *Auto, CHS, LBA, Large*

Drive A/B: Set the floppy drive type. None; 350K, 5.25in; 1.2M, 5.25in.; 720K, 3.5in.; 1.44M, 3.5in.; 2.88M, 3.5in

Video [EGA/VGA]

Select the type of video display card installed in your system.

EGA/ VGA: For EGA, VGA, SEGA, SVGA, or PGA monitors adapters.

CGA 40: Color Graphic Adapter, powering up in 40-column mode.

CGA 80: Color Graphic Adapter, powering up in 80-column mode.

MONO: Monochrome adapter, including high-resolution monochrome adapters.

Halt On [All, But Keyboard]

This field determines whether the system will stop if an error is detected during powering up.

All errors: Stop and prompt whenever the BIOS detect a non-fatal error.

No errors: The system boot will not stop for any error that may be detected.

All, But Keyboard: Stop and prompt for all other errors but a keyboard error.

All, But Diskette: Stop and prompt for all other errors but a diskette error.

All, But Disk/Key: Stop and prompt for all other errors but a keyboard or disk error.

Select Display Device: *CRT, TV, CRT+TV, AUTO*

Select TV mode: *NTSC, PAL*

Memory: This field displays the amount of memory detected during the boot process.

4.3 ADVANCED BIOS FEATURES

Phoenix – AwardBIOS CMOS Setup Utility		
Advanced BIOS Features		
Virus Warning	[Disabled]	Item Help
CPU L1 & L2 Cache	[Enabled]	Menu Level ? Allows you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep
CPU L2 Cache ECC Checking	[Enabled]	
Quick Power On Self Test	[Enabled]	
First Boot Device	[Floppy]	
Second Boot Device	[HDD – 0]	
Third Boot Device	[LS120]	
Boot Other Device	[Enabled]	
Swap Floppy Drive	[Disabled]	
Boot Up Floppy Seek	[Enabled]	
Boot Up Numlock Status	[On]	
Typematic Rate Setting	[Disabled]	
* Typematic Rate (Chars/Sec)	6	
* Typematic Delay (Msec)	250	
Security Option	[Setup]	
OS Select For DRAM > 64MB	[Non – OS2]	
Video BIOS Shadow	[Enabled]	
Small Logo(EPA) Show	[Disabled]	
??? ? :Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

Virus warning: Allows you to choose the VIRUS warning feature for IDE hard disk boot sector protection. If it is enabled and someone attempt to write data into the sector, BIOS will show a warning message on screen and alarm beep. *Enabled, Disabled*

CPU L1 & L2 Cache *Enabled, Disabled*

CPU L2 Cache ECC Checking *Enabled, Disabled*

Quick Power On Self Test: Allows the system to skip some tests while booting. *Disabled* is Normal POST. *Enabled, Disabled:*

First (Second, Third) Boot Device: Select Your Boot Device Priority.

Floppy, LS120, HDD-0, SCSI, CD-ROM, HDD-1, HDD-2, HDD-3, ZIP100, LAN, Disabled.

Boot Other Device: Enable boot from other device.

Swap Floppy Drive If the system have two floppy drives, choose *Enabled* to assign physical drive B to logical drive A and vice-versa. *Disabled, Enabled*

Boot Up Floppy Seek: Tests the tracks of floppy drives to determine whether they have 40 or 80 tracks. *Enabled, Disabled*

Boot Up NumLock Status: Selects power on state for NumLock. *On, Off*

Typematic Rate Setting: Keystrokes repeat at a rate determined by the keyboard controller, When enabled, you can configure the following two items. *Enabled, Disabled*

Typematic Rate (chars/sec):The rate at which character repeats when you hold down a key.

Typematic Delay (Msec): The delay before keystrokes begin to repeat.

Security Option: Determine whether the password is required every time the system boots or only when you enter setup. *Setup, System*

OS Select For DRAM>64MB: Selects OS2 only if you are running OS/2 operating system with more than 64MB RAM. *Non-OS2, OS2*

Video BIOS Shadow Enabled copies Video BIOS to shadow RAM to improves performance. *Enabled, Disabled*

Small Logo(EPA) show: *Disabled, Enabled*

4.4 ADVANCED CHIPSET FEATURES SETUP

Phoenix – AwardBIOS CMOS Setup Utility Advanced Chipset Features

Award BIOS Description

? DRAM Clock/Drive Control	[Press Enter]	Item Help
? AGP & P2P Bridge Control	[Press Enter]	
? CPU & PCI Bus Control	[Press Enter]	
Memory Hole	[Disabled]	Menu Level ?
System BIOS Cacheable	[Disabled]	
Video RAM Cacheable	[Disabled]	
Delay Prior to Thermal	[16 Min]	
VGA Share Memory Size	[32M]	
FB Address Conversion	[Enabled]	
FB Page Close Prediction	[Enabled]	
??? ? :Move Enter:Select +/-PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

DRAM Clock/Drive Control: Press <Enter> to enter the submenu.

DRAM Clock: *By SPD, 100MHz, 133MHz*

DRAM Timing: *By SPD, Manual.*

When choose “Manual”, the following six items will display.

SDRAM CAS Latency: *2, 2.5*

Bank Interleave: *Disabled, 2 Bank, 4 Bank*

Precharge to Active(Trp): *3T, 2T*

Active to Precharge(Tras): *6T, 5T*

Active to CMD(Trcd): *3T, 2T*

DRAM Command Rate: *2T Command, 1T Command*

DRAM Burst Len: *4, 8*

CPU read DRAM Mode: *Fast, Medium, Slow*

AGP & P2P Bridge Control: Press <Enter> to enter submenu. Default setting is recommended.

AGP Aperture Size: *64M, 32M, 16M, 8M, 4M, 256M, 128M*

AGP Mode: *4X, 2X, 1X*

AGP Driving Control: *Auto, Manual*

When choose *Manual*, the following one item can be modified.

AGP Driving Value: *DA, 00~FF*

AGP Fast Write: *Disabled, Enabled*

AGP Master 1WS Write: *Disabled, Enabled*

AGP Master 1 WS Read: *Disabled, Enabled*

CPU & PCI Bus Control: Press <Enter> to enter submenu

CPU to PCI Write Buffer: *Enabled, Disabled*

PCI Master 0 WS Write: *Enabled, Disabled*

PCI Delay Transaction: *Disabled, Enabled*

Memory Hole Set the memory hole reserved for expanded ISA card. *Disabled, 15M-16M*

Chapter 4

System BIOS Cacheable: Besides conventional memory, the system BIOS area is also cacheable. *Enabled, Disabled*

Video RAM Cacheable: Besides conventional memory, video RAM area is also cacheable. *Enabled, Disabled*

Delay Prior to Thermal: *16 Min, 32 Min, 4 Min, 8 Min*

VGA Share Memory Size: *32M, Disabled, 8M, 16M*

FB Address Conversion: *Enabled, Disabled*

FB Page Close Prediction: *Enabled, Disabled*

4.5 INTEGRATED PERIPHERALS

Phoenix – AwardBIOS CMOS Setup Utility		
Integrated Peripherals		
? VIA OnChip IDE Device	[Press Enter]	Item Help
? VIA OnChip PCI Device	[Press Enter]	Menu Level ?
? SuperIO Device	[Press Enter]	
Init Display First	[PCI Slot]	
USB Keyboard Support	[Disabled]	
IDE HDD Block Mode	[Enabled]	
??? ? :Move Enter:Select +/-PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

VIA OnChip IDE Device: Press <Enter> to enter submenu.

OnChip IDE Channel0/1: *Enabled, Disabled*

IDE Prefetch Mode: *Enabled, Disabled*

Primary/Secondary Master/Slave PIO: *Auto, Mode 0~4*

Primary/Secondary Master/Slave UDMA: *Auto, Disabled*

VIA OnChip PCI Device: Press <Enter> to enter submenu.

VIA -3058 AC97 Audio: *Auto, Disabled*

VIA -3068 MC97 Modem: *Auto, Disabled*

Supper IO Device: Press <Enter> to enter submenu.

Onboard FDC Controller: *Enabled, Disabled*

Onboard Serial Port 1/2: Defines the onboard serial port address and IRQ number. *3F8/IRQ4, 2F8/IRQ3, 3E8/IRQ4, 2E8/IRQ3, Auto, Disabled.*

UART Mode Select: *Normal, IrDA, ASKIR*

RxD, TxD Active: *Hi,Lo; Lo,Hi; Lo,Lo; Hi,Hi*

IR Transmission Delay: *Enabled, Disabled*

UR2 Duplex Mode: *Half, Full*

Use IR Pins: *IR-Rx2Tx2; Rx2D2,TxD2*

Onboard Parallel Port: Defines onboard parallel port address and IRQ number. *378/IRQ7, 278/IRQ5, 3BC/IRQ7, Disabled.*

Parallel Port Mode: *SPP, EPP, ECP, ECP+EPP, Normal*

EPP Mode Select: *EPP1.7, EPP1.9*

ECP Mode Use DMA: *3,1*

Game Port Address: *201, 209, Disabled*

Midi Port Address: *Disabled, 330, 300, 290*

Midi Port IRQ: *5, 10*

Chapter 4

Init Display First *PCI Slot, AGP.*

USB Keyboard Support: Support USB Keyboard under DOS status. *Disabled, Enabled*

IDE HDD Block Mode: . If your IDE hard drive supports block mode, select Enabled for automatic detection of the optimal number of block read/writes per sector the drive can support.

Enabled, Disabled.

4.6 POWER MANAGEMENT SETUP

Phoenix – AwardBIOS CMOS Setup Utility		
Power Management Setup		
ACPI Function	[Enabled]	Item Help
Power Management Option	[User Define]	
HDD Power Down	[Disabled]	Menu Level ?
Suspend Mode	[Disabled]	
Video Off Option	[Suspend -> Off]	
Video Off Method	[V/H SYNC+Blank]	
MODEM Use IRQ	[3]	
Soft – Off by PWRBTN	[Instant – Off]	
PWRON After PWR-Fail	[Off]	
? IRQ/Event Activity Detect	[Press Enter]	
??? ? :Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

ACPI function *Enabled, Disabled.*

Power Management Option:

User Define: Users can configure their own Power Management Timer.

Min Saving - defined timer values are used. All timers are in their MAX values.

Max Saving - defined timer values are used. All timers are in their MIN values.

HDD Power Down

Disabled: HDD's motor will not be off by timer.

1 - 15 Min: Set the HDD idle time before the HDD enters power saving mode (motor off).

Suspend Mode

Disabled: The system never enters Suspend mode by timer.

1 Min ~ 1Hr: Defines the continuous idle time before the system enters Suspend mode. If any items defined in "PM Events" are on and activated, the system will be woken up.

Video Off Option *Suspend -> Off, MODEM Use IRQ, Always On*

Video Off Method

V/H SYNC+Blank: In addition to Blank Screen, BIOS will also turn off the V-SYNC & H – SYNC signals from VGA card to monitor.

DPMS Support: This function is enabled only for VGA cards supporting DPMS.

Blank Screen: The system BIOS will only blank off the screen when disabling video.

Note: When the green monitor does not detect the V/H-SYNC signals, the electron gun will be turned off.

MODEM Use IRQ: Special wake-up event for Modem. 3, 4, 5, 7, 9, 10, 11 NA.

Soft-Off by PWRBTN

Instant-Off The system will immediately power off once the power button is pressed.

Delay 4 sec The system will power off when power button is pressed for 4 seconds.

IRQ/Event Activity Detect: Press Enter to <enter> submenu.

VGA: *OFF, ON*

LPT & COM: *LPT/COM, NONE, LPT, COM*

HDD & FDD: *ON, OFF*

PCI Master: *OFF, ON*

PowerOn by PCI Card: *Disabled, Enabled*

Wake Up On LAN/Ring: *Disabled, Enabled*

RTC Alarm Resume: *Disabled, Enabled*

When choose Enabled, the following two items can be modified.

Date (of Month): *0~31*

Resume Time (hh:mm:ss): *00: 00 : 00*

IRQs Activity Monitoring: Press <Enter> to enter submenu.

Primary INIR: *ON, OFF.*

When choose ON, the following items can be set to *Disabled* or *Enabled*.

IRQ3 (COM 2)

IRQ4 (COM 1)

IRQ5 (LPT 2)

IRQ6 (Floppy Disk)

IRQ7 (LPT 1)

IRQ8 (RTC Alarm)

IRQ9 (IRQ2 Redir)

IRQ10 (Reserved)

IRQ11 (Reserved)

IRQ12 (PS/2 Mouse)

IRQ13 (Coprocessor)

IRQ14 (Hard Disk)

IRQ15 (Reserved)

4.7 PNP/PCI CONFIGURATION SETUP

Phoenix – AwardBIOS CMOS Setup Utility		
PnP/PCI Configuration		
PNP OS Installed	[No]	Item Help
Reset Configuration Data	[Disabled]	
Resources Controlled By	[Auto (ESCD)]	Menu Level ?
*IRQ Resource	Press Enter	
PCI/VGA Palette Snoop	[Disabled]	
Assign IRQ For VGA	[Enabled]	
Assign IRQ For USB	[Enabled]	
INT Pin 1 Assignment	[Auto]	
INT Pin 2 Assignment	[Auto]	
INT Pin 3 Assignment	[Auto]	
INT Pin 4 Assignment	[Auto]	
??? ? :Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

PNP OS Installed: Select *Yes* if you are using a Plug and Play capable operation system; Select *No* if you need the BIOS to configure non-boot devices. *No, Yes*

Reset Configuration Data: Default is *Disabled*. Select *Enabled* to reset ESCD when you exit Setup if you have installed a new add-on and the system reconfiguration has caused such a serious conflict that the OS cannot boot. *Enabled/ Disabled*

Resources Controlled By BIOS can automatically configure all the boot and PnP compatible devices. If you choose *Auto*, you cannot select IRQ DMA and memory base address fields, because BIOS automatically assigns them. *Auto(ESCD), Manual*.

PCI/VGA Palette Snoop *Disabled* is default setting. *Enabled* Non-standard VGA cards such as graphics accelerators or MPEG video cars may not show colors properly. Enabling this item can solve this problem.

Assign IRQ For VGA/USB: *Enabled, Disabled*

INT Pin 1/2/3/4 Assignment: *Auto, 3, 4, 5, 7, 9, 10, 11, 12, 14, 15*

4.8 PC HEALTH STATUS

Phoenix – AwardBIOS CMOS Setup Utility		
PC Health Status		
CPU Warning Temperature	[Disabled]	Item Help
Current System Temp.		
Current CPU1 Temperature		Menu Level ?
Current CPUFAN1 Speed		
Current CPUFAN2 Speed		
Current CPUFAN3 Speed		
IN0 (V)		
IN1 (V)		
IN2 (V)		
+5 V		
+12 V		
-12 V		
-5 V		
UBAT (V)		
5VSB (V)		
Shutdown Temperature	[Disabled]	
??? ? :Move Enter:Select +/-PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults		

CPU Warning Temperature: Enabled an beep alarm when the CPU temperature is over this value. *Disabled*, Enabled

Shutdown Temperature Set the shutdown temperature.

4.9 FREQUENCY/VOLTAGE CONTROL

Phoenix – AwardBIOS CMOS Setup Utility		
Frequency/Voltage Control		
CPU Clock Ratio	[8 X]	Item Help
Auto Detect PCI/DIMM Clk	[Enabled]	

	Menu Level ?
??? ? :Move Enter:Select +/-PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail - Save Defaults F7: Optimized Defaults	

CPU CLOCK Ratio: Selects the multiplication of processor core frequency. If a Ratio locked processor installed, this item will be hidden. This item is only for users who understand all the CPU parameters, i.e. system bus frequency, “66MHz” and multiplication of processor core frequency for system bus frequency “x3, x3.5, x4, x4.5, x5, x5.5, x6, x6.5, x7, x7.5, x8”. Selects the CPU speed according to your CPU brand and type. *8X~49X*,

Auto detect DIMM/PCI Clk *Enabled* Close empty DIMM or PCI clock to reduce EMI.
Disabled Does not close empty DIMM or PCI clock.

Warning: *Be sure your selection is right. CPU over speed will be dangerous!*

Spread spectrum: *Disabled, Enabled*

CPU Host/AGP/PCI Clock:

Default, 100/66/33Mhz, 102/68/34Mhz, 105/70/35Mhz, 108/72/36Mhz, 114/76/38Mhz, 117/78/39Mhz, 120/80/40Mhz.

4.10 PASSWORD SETTING

When you select “Set User Password” or “Set Supervisor Password” and press **Enter**, the following message will appear at the center of the screen:

ENTER PASSWORD

Type the password, up to eight characters, and press **Enter**. The password typed now will clear any previously entered password from CMOS memory. You will be asked to confirm the password. Type the password again and press **Enter**. You may also press **Esc** to abort the selection.

To disable password, just press **Enter** when you are prompted to enter password. A message as below will confirm the password being disabled. Once the password is disabled, the system will boot and you can enter BIOS Setup freely.

PASSWORD DISABLED

If you have selected “**System**” in “Security Option” of “BIOS Features Setup” menu, you will be prompted for the password every time the system reboots or any time you try to enter BIOS Setup.

If you have selected “**Setup**” at “Security Option” from “BIOS Features Setup” menu, you

Chapter 4

will be prompted for the password only when you enter BIOS Setup.

Supervisor Password has higher priority than User Password. You can use Supervisor Password when booting the system or entering BIOS Setup to modify all settings. Also you can use User Password when booting the system or entering BIOS Setup but can not modify any setting if Supervisor Password is enabled.

4.11 EXIT SETUP

Save & Exit Setup

After finish modifying the values, choose this item to save the changes to the CMOS RAM. A confirmation message will appear, type “Y” and press **Enter** to save and exit Setup.

Exit Without Saving

If you do not want to save the changes, choose this item to exit Setup without saving changes. A confirmation message will appear, type “Y” and press **Enter** to save and exit Setup.

4.12 BOOT WITH BIOS DEFAULTS

If you have made all the changes to CMOS values and the system cannot boot with the CMOS values selected in setup, clear CMOS after power-down, then power on again. System will boot with BIOS default settings.

APPENDIX A

QUICK GUIDE

The table below summaries the functions and settings of each jumper of the motherboard.

Function		Jumper Settings	
Clear CMOS Data	Normal	JBAT1	1-2
	Clear	JBAT1	2-3
CPU Frequency	133 MHz	SW1.2, SW2.3	Open
	100 MHz	SW1.2, SW2.3	Short